# 5-Point Rotary
# Dual Static

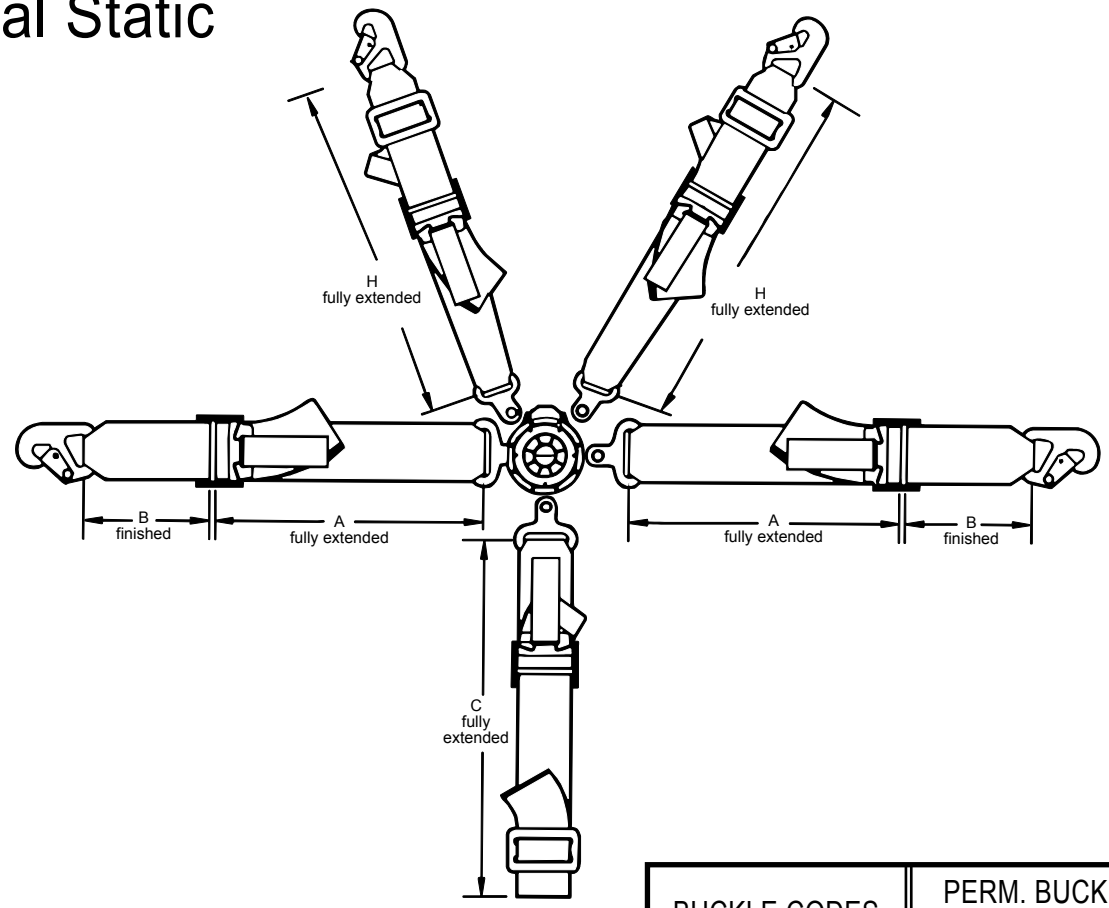


## PART NO. SYSTEM

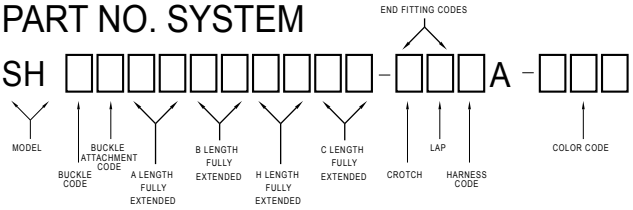


## SAMPLE PART

SHAB26304612-BEEA-601

The cam lock rotary is available in a 5-point or 4-point configuration. Dual shoulder harness attachments and an optional anti-sub or crotch strap ensure a proper fit for your requirements. Refer to ther Hardware Selection for the proper crotch strap.

| BUCKLE CODES | | PERM. BUCKLE ATTACHMENT | |
|---|---|---|---|
| CODE | P/N | CODE | DESCRIPTION |
| A | SL 10 | B | LEFT |
| C | SL 11 | C | RIGHT |

| END FITTINGS | | |
|---|---|---|
| 4D | 4E | 4G |
|  4C | 4B | 4A |

| END FITTING CODES | | | | | |
|---|---|---|---|---|---|
| CODE | P/N | BOLT HOLE | CODE | P/N | BOLT HOLE |
| A | 4A | .375 HOOK | D | 4D | .386 HOLE |
| B | 4B | .25 HOLE | E | 4E | .406 HOLE |
| C | 4C | .325 HOLE | G | 4G | .386 HOLE |

**Aircraft Belts, Inc.**
**1176 Telecom Drive**
**Creedmoor, NC 27522**
**Phone: 800.847.5651 - Fax 919.956.4220**
**www.aircraftbelts.com**

NOTES:

1. Complete assembly conforms to FAA TSO C114
2. Identification labels affixed to each portion of the assembly.
3. Lap assembly rated to 3000 lbs. Harness assembly rated to 2500 lbs.
4. Rotary buckle is black polycarbonate, but an aluminum version is available for custom plating